
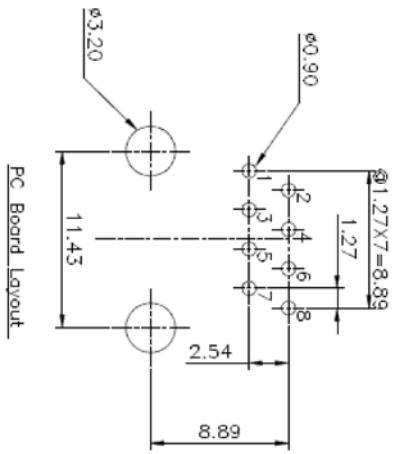


ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	10/10/18	KL	

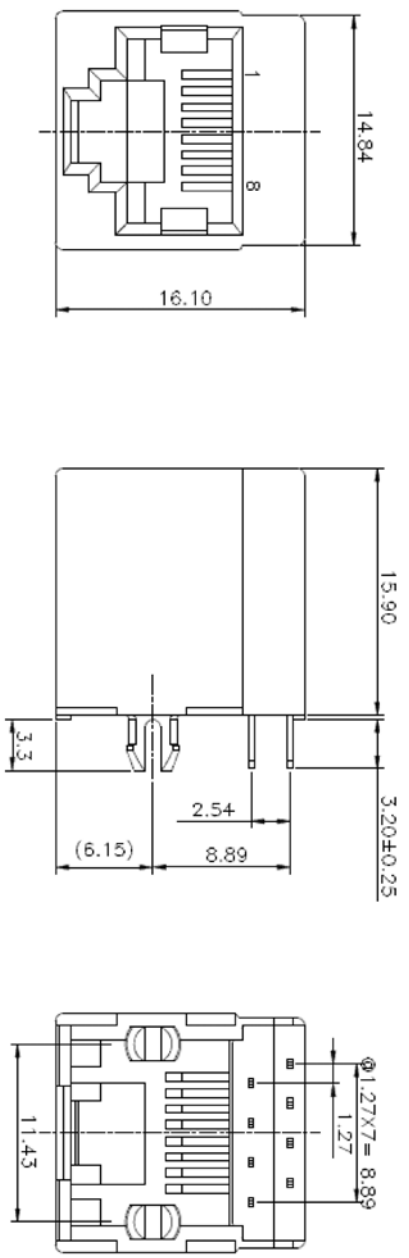

Tolerance	±0.20
.x	±0.15
.xx	±5°
ang.	

UNIT: mm

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING : 125 VAC RMS.
  - CURRENT RATING : 1.5 AMP.
  - CONTACT RESISTANCE : 35 MILLIOHMS MAX.
  - INSULATION RESISTANCE : 1000 MEGOHMS @ 500 VDC. MIN.
  - DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.
- MECHANICAL:
- HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
  - CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
  - PLATING : GOLD PLATING OVER NICKEL.
  - OPERATING LIFE : 750 CYCLES MIN.
  - PCB RETENTION PRE-SOLDER : 1 LB MIN.
  - PCB RETENTION POST-SOLDER : 10 LBS MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C
  - OPERATION : 0°C TO 70°C.

CONFIDENTIAL



© Copyright 2018 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 10/10/18	TITLE: CAT.6 RJ45 TOP ENTRY PCB JACK UTP
CHECKED:	DATE:	
ENGINEER:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
SCALE: NONE	SIZE: B	DRAWING NO. R258-8-C6
		REV: A
SHEET 1	of 1	