
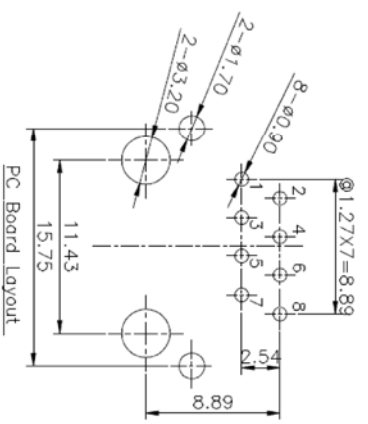
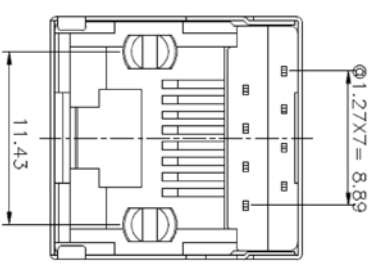
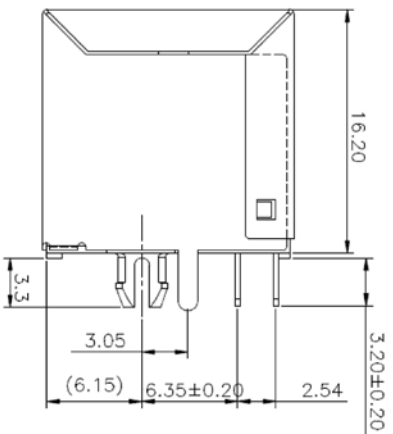


ROHS COMPLIANT

REV	ECO NO.	DATE	BY	App'D
A	REL TO PRODUCTION PER ECO 001	10/10/18	KL	

DWG NO. R258S-8-C6

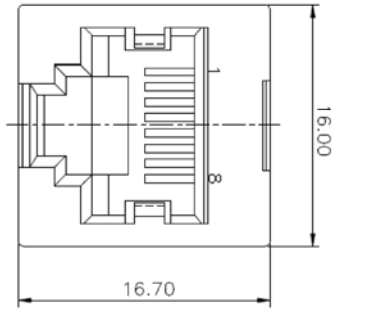

Tolerance	±0.20
.x	±0.15
.xx	±5°
ang.	

UNIT: mm

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING : 125VAC.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 35 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS @ 500 VDC. MIN.
 - DIELECTRIC STRENGTH : 1000 VAC 60HZ, 1MIN.
- MECHANICAL:
- HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
 - SHIELD MATERIAL : COPPER ALLOY T=0.20mm.
 - PLATING : GOLD PLATING OVER NICKEL.
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER : 10 LBS MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C
 - OPERATION : -40°C TO +85°C

CONFIDENTIAL



© Copyright 2018 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KJM	DATE: 10/10/18	TITLE: CAT.6 RJ45 TOP ENTRY PCB JACK
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO. R258S-8-C6
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 OF 1