



RoHS Compliant

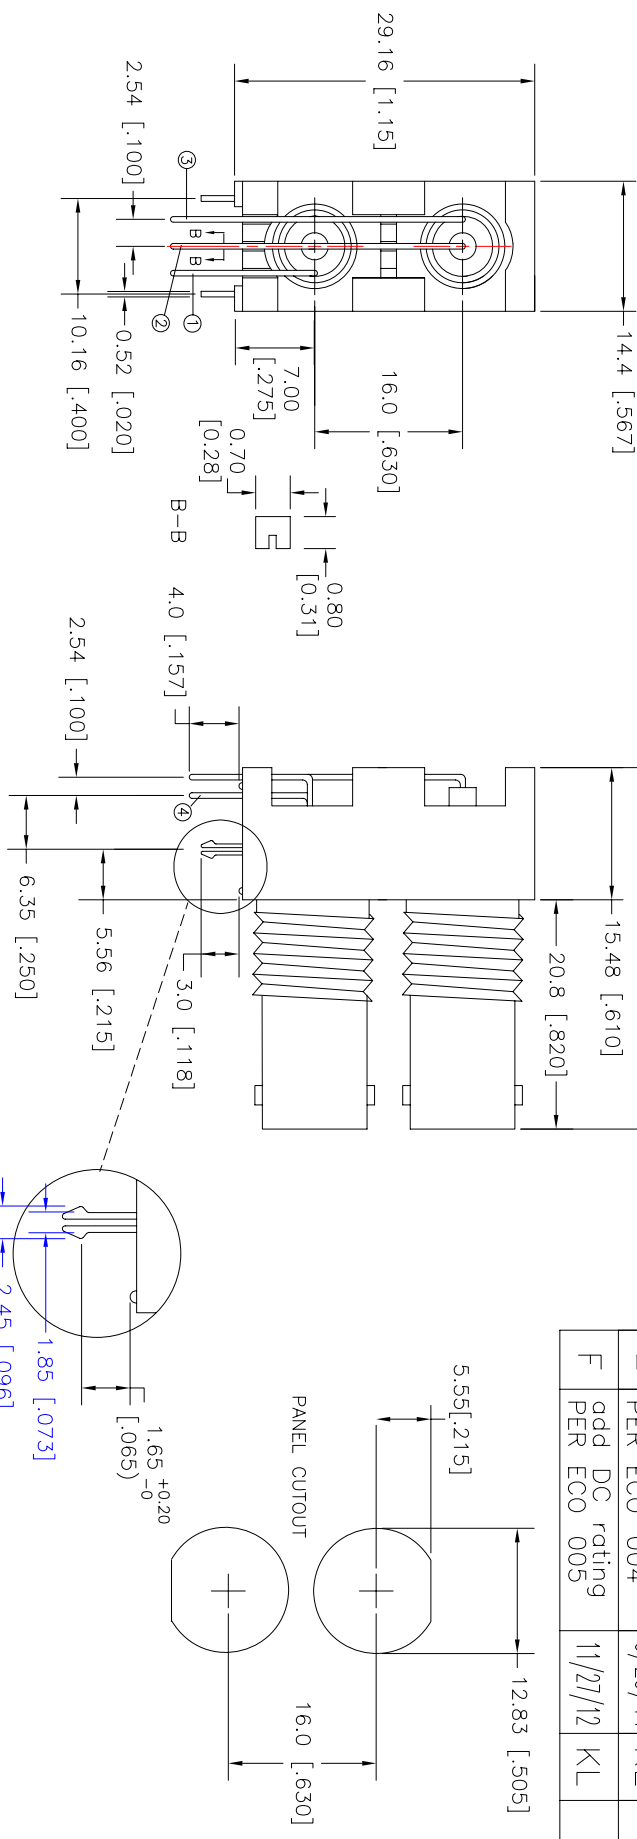

Description	Material & Treatment	Q'ty
Housing	PBT+30%G.F. UL 94V-0	1
Contact	Gold Plating at Contact Area Phosphor Bronze Tin Plating on Tails Over 50µm Nickel Plating Overall	2
Insulator	Polypropylene UL 94V-0	2
Conn. Body	Nickel Plating Over Zinc Alloy	2
Mounting Post	Tin Plating Over Brass	2
Grounding Terminal	Tin Plating Over Copper Wire	1
Nut	Nickel Plating Over Brass	2
Lock Washer	Nickel Plating Over Carbon Steel	2

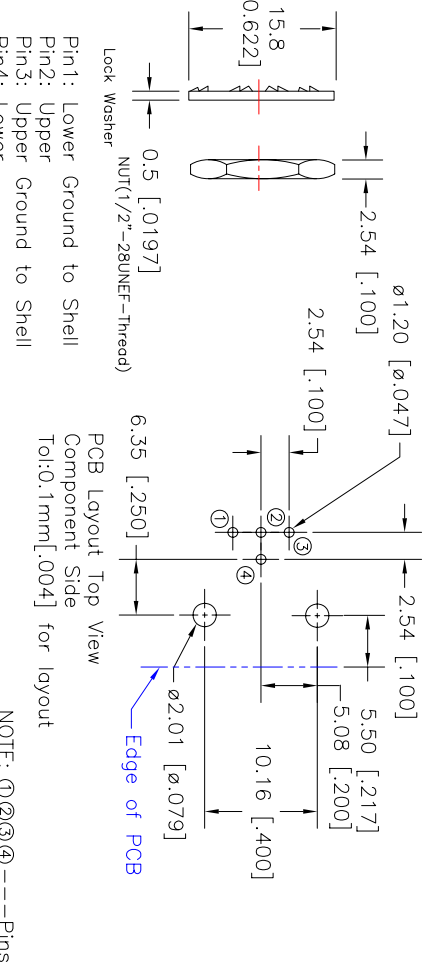

CONFIDENTIAL



Notes: (Unless otherwise specified)

Dimensions in Millimeters & [Inches]

Tolerance: ±0.3mm[.012]

Impedance: 50 ohms

Frequency Range: 0-1 GHz

Operating Voltage: 500 V RMS, 350VDC

Contact Resistance: 3.0 Milliohms MAX

Dielectric Withstanding Voltage: 1500 V RMS, 1200VDC

Insulation Resistance: 5000 Megohms MIN

Current DC: 3A Max.

© Copyright 2012 Regal Electronics, Inc.
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 8/15/06	TITLE: Dual Plastic BNC Connector
CHECKED:	DATE:	
ENGINEER:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
SCALE: NONE	DRAWING NO. BNC31202-HWV-50R	REV F
SHEET 1	OF 1	