

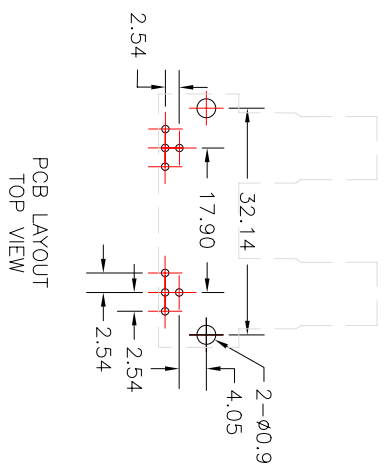


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	2/24/09	KL	

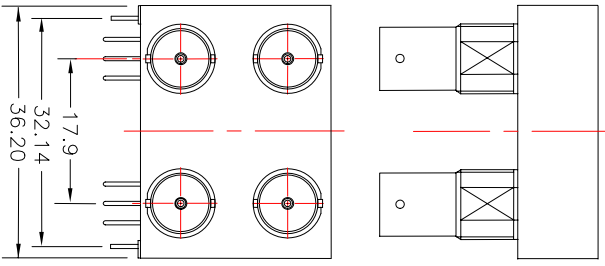

CONFIDENTIAL

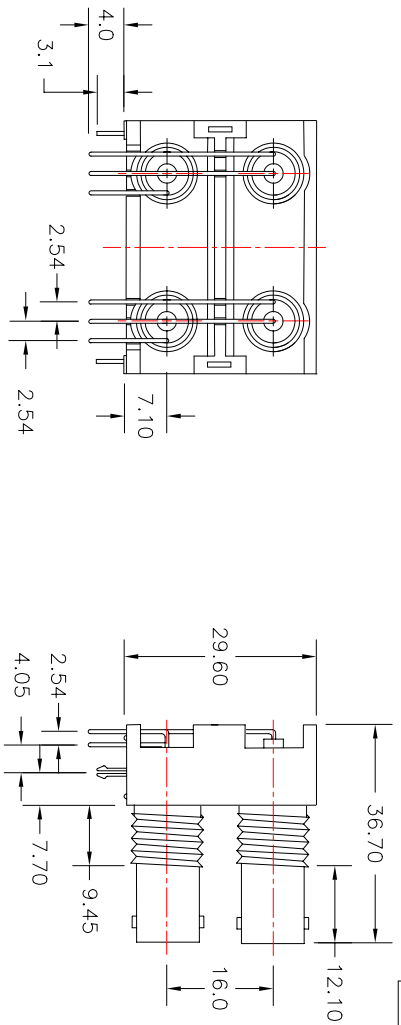

© Copyright 2009 Regal Electronics, Inc.  
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN:	KIM	DATE	2/24/09
CHECKED:		DATE	
ENGINEER:		DATE	
APPROVED:		DATE	
APPROVED:		DATE	
APPROVED:		DATE	

2x2 Port Plastic  
BNC R/A Connector

Notes: (Unless otherwise specified)  
Dimensions in Millimeters  
Tolerance: ±0.3mm  
Impedance: 75 ohms  
Frequency Range: 0–1 GHz  
Operating Voltage: 500 Volts RMS  
Contact Resistance: 3.0 Milliohms MAX  
Dielectric Withstanding Voltage: 1500 Volts RMS  
Insulation Resistance: 5000 Megohms MIN

5 4 3 2 1

A

C-BNC-31204-HW-75R