


REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO	1/4/06	KL	

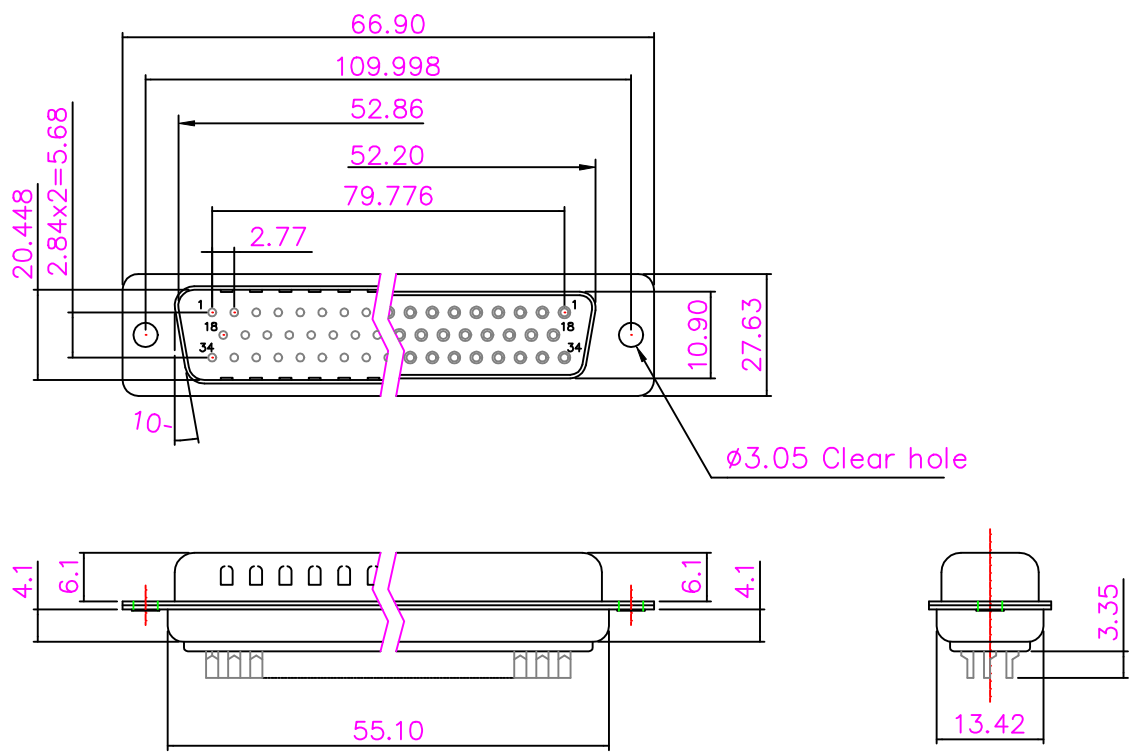

50 Positions

Product Specification

Material

Insulator : Glass-Filled PBT, UL94V-0
 Shell : Steel, tin plated
 Contact : Socket-Phosphor Bronze
 Pin-Brass
 Plated gold in mating area over nickel underplate
 Operating temperature: -55°C-105°C

Electrical

Contact Resistance : 15 milliohms Max.
 Insulation Resistance : 1000 megohms at 500 VDC
 Dielectric Withstanding Voltage : 1000 VAC for 1 minute
 Current Rating : 3 AMP
 Voltage Rating : 250 VAC/rms

Tolerance	
.x	±0.35
.xx	±0.25

UNIT: mm

CONFIDENTIAL



NOTE:
 This component and all homogeneous subcomponents are RoHS compliant

© Copyright 2006 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 1/4/06
CHECKED:	DATE:
ENGINEER:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:

TITLE: D-Subminiature Standard Size Connector		
SIZE: B	DRAWING NO.: R4007/R4008-50	REV: A
SCALE: NONE	SHEET 1 OF 1	