

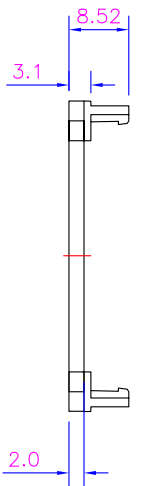


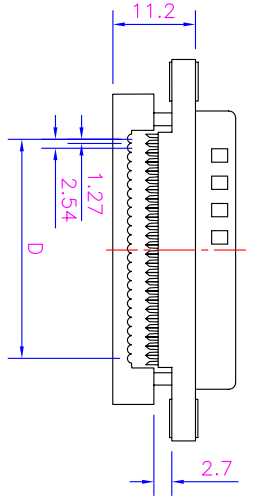


ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	3/14/07	KL	

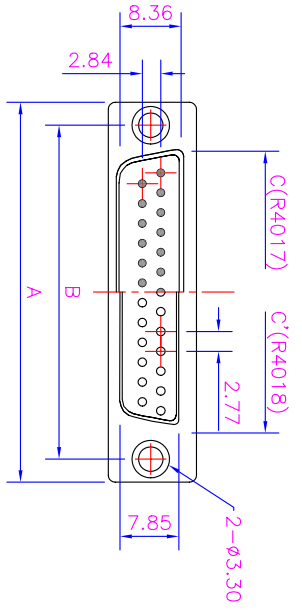

STRAIN RELIEF

- SPECIFICATIONS:
- .WIRE SIZE: AWG 26 ~ 28
  - .DIELECTRIC MATERIAL: PBT +30%GF U194V-0
  - .CONTACT FLASHING: GOLD OVER NICKEL
  - .CONTACT MATERIAL: PHOSPHOR BRONZE
  - .INSULATION RESISTANCE: 1000Megohms AT 500Vdc
  - .OPERATING TEMPERATURE: -55°C ~ 105°C
  - .CONTACT RESISTANCE: 15milliohms MAX.

POSITIONS	A	B	C	C'	D	E
9	30.89	24.99	16.92	16.25	10.16	16.33
15	39.14	33.32	25.25	24.58	17.78	24.66
25	53.09	47.04	38.96	38.30	30.48	38.38
37	69.39	63.5	55.45	54.76	45.72	54.84

Tolerance  
 .x ±0.2  
 .xx ±0.1  
 ang. ±2°

UNIT: mm

CONFIDENTIAL



© Copyright 2007 Regal Electronics, Inc.  
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 3/14/07	TITLE: D-SUB IDC TYPE CONNECTOR
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO.: R4017/8-xxA-BK
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	REV: A
APPROVED:	DATE:	SHEET 1 OF 1

5 4 3 2 1