
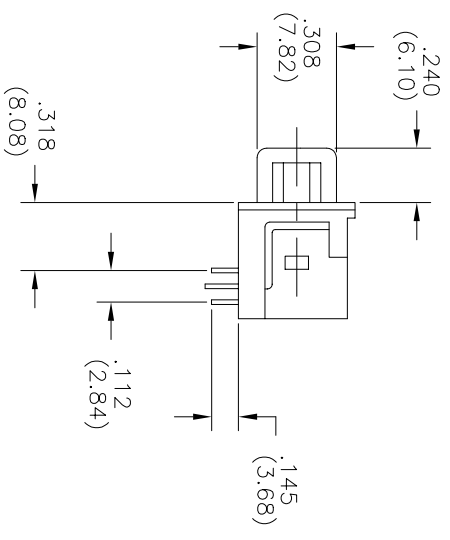
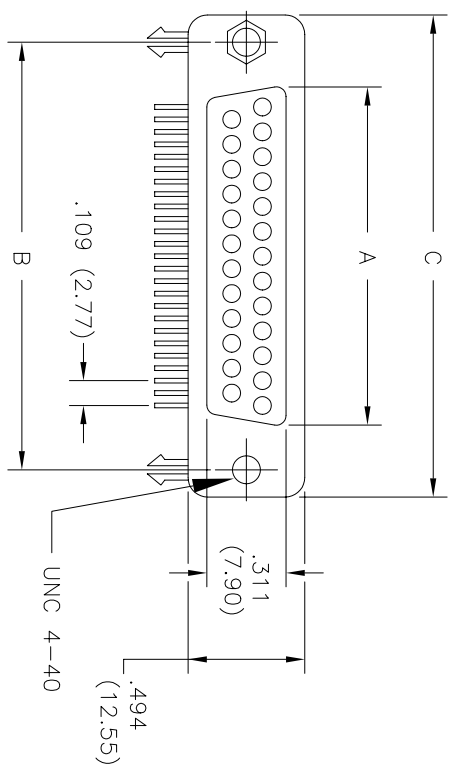
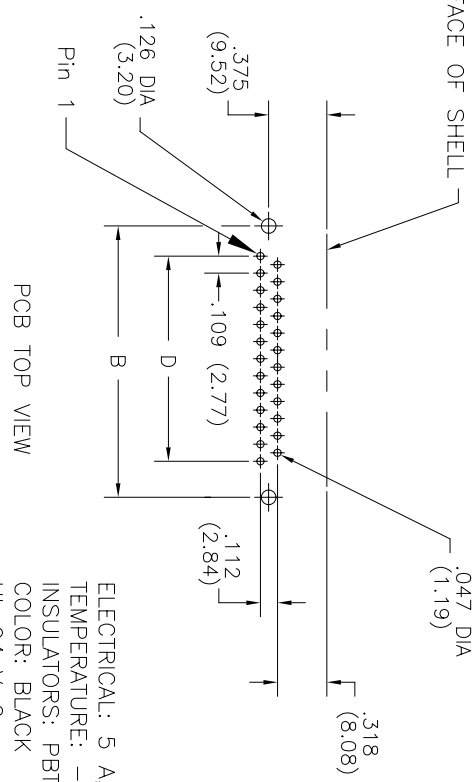


ROHS compliant

REV	ECO NO.	DATE	BY	APP'D
A	INITIAL DRAWING PER ECO 001	4/25/06	KL	

DWG NO. R4020-SERIES 1

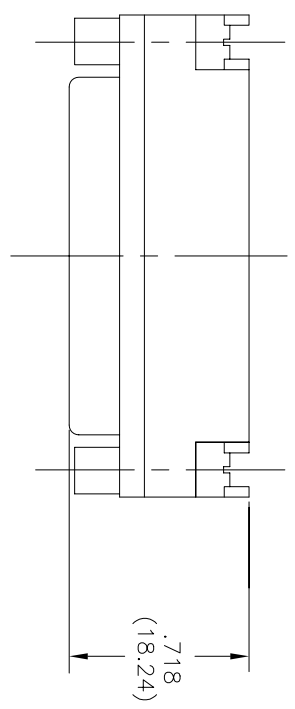

ELECTRICAL: 5 A, 300 V DC  
 TEMPERATURE: -55°C - 105°C  
 INSULATORS: PBT GLASS-FILLED  
 COLOR: BLACK  
 UL 94 V-0  
 MALE PIN IS BRASS  
 FEMALE SOCKET IS PHOSPHOR BRONZE  
 STANDARD PLATING: 6μ INCH GOLD  
 IR: > 5000 MEGOHMS  
 CR: < 10 MILLIOHMS

4020 - (contacts) - BT  
 Female  
 Contacts: 9, 15, 25, 37  
 (Ground straps available)

Tolerance	±0.35
.x	±0.25
.xx	

UNIT: mm

NO. OF POSITIONS	A	B	C	D
9	.643 (16.33)	.984 (24.99)	1.216 (30.89)	.431 (10.96)
15	.971 (24.66)	1.312 (33.32)	1.539 (39.10)	.755 (19.18)
25	1.511 (38.38)	1.852 (47.04)	2.090 (53.09)	1.309 (33.24)
37	2.159 (54.84)	2.500 (63.50)	2.732 (69.04)	1.963 (49.86)

CONFIDENTIAL

© Copyright 2006 Regal Electronics, Inc.  
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 4/25/06	TITLE: D-SUBMINIATURE CONNECTOR
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO. R4020-SERIES
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 OF 1

A

B

C

D

A

B

C

D

5

4

3

2

1