



ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	06/18/07	KL	

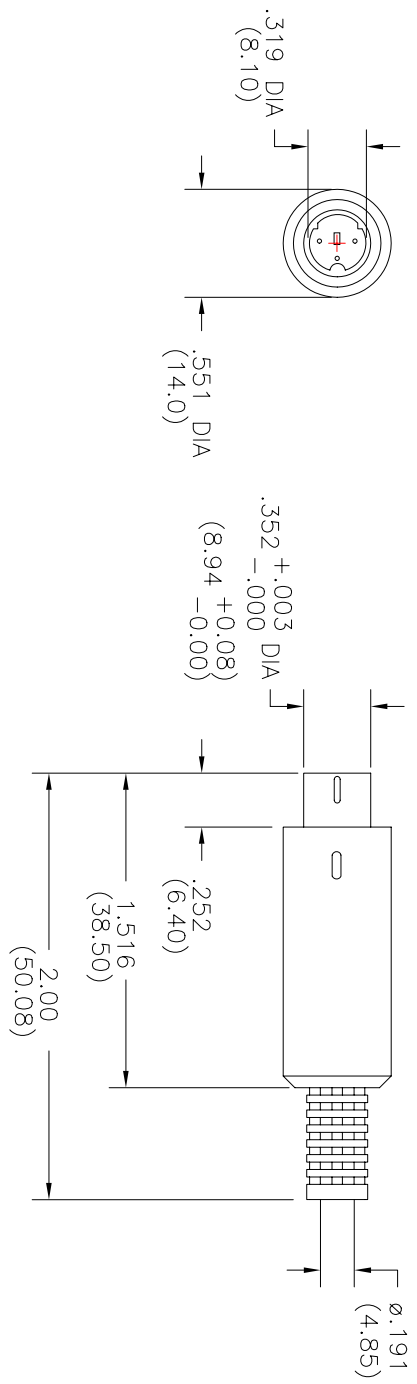

NO. OF CONTACTS	3P	4P	5P	6P	7P	8P	9P
POSITION							



MINI DIN R4031 - (contacts)
Contacts: 3, 4, 5, 6, 7, 8, 9

MATERIAL/FINISH:
METAL SHELL: BRASS
CONTACT MATERIAL: PLUG=BRASS, SOCKET=PHOSPHOR BRONZE
CONTACT PLATING: TIN
MOLD-IN COVER: TINNED/BRASS
INSULATOR: PBT FIBRE FILLED (UL 94 V-0)
COVER: A.B.S.
STRAIN RELIEF CAP: PVC

ELECTRICAL:
TEMPERATURE RANGE: -25°C TO +85°C
APPLICABLE WIRES: AWG #26 TO #30
CURRENT RATING: 1A AC/DC
INSULATION RESISTANCE: 500MΩ MIN
VOLTAGE RATING: 50V AC/DC
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 30milliohms Max.

CONFIDENTIAL

© Copyright 2007 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

Tolerance: x.x 0.3 UNIT: inches
(mm) x.xx 0.2 (mm)



DRAWN: KIM	DATE: 6/18/07	TITLE: CABLE TYPE
CHECKED:	DATE:	DIN CONNECTOR
ENGINEER:	DATE:	MALE (3~9pin)
APPROVED:	DATE:	SIZE: B
APPROVED:	DATE:	DRAWING NO. R4031 - SERIES
APPROVED:	DATE:	SCALE: NONE
		SHEET 1 OF 1

5 4 3 2 1