




REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	10/25/10	KL	

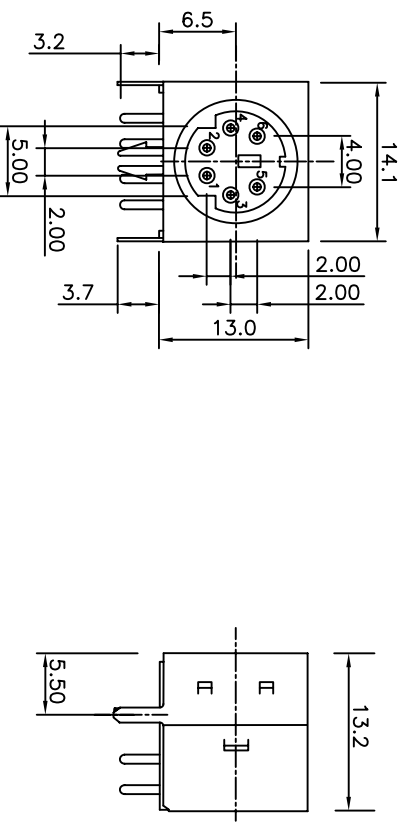

ELECTRICAL:
 .Current rating: 1 AMP max. @100Vac
 .Insulation resistance: 50 Megohms Min. @250Vdc
 .Contact resistance: 30 milliohms maximum
 .Dielectric withstanding voltage: 250 VAC
 .Operating temperatures: -55°C to +85°C

MATERIALS:
 .Housing: UL94V-0 / PBT
 .Contacts: Phosphor bronze, Silver Plated
 .Shield : Brass, Tin Plated

R5145-6-FT
 6 : 6Pins
 FT= Ferrite Filter
 R= RoHS

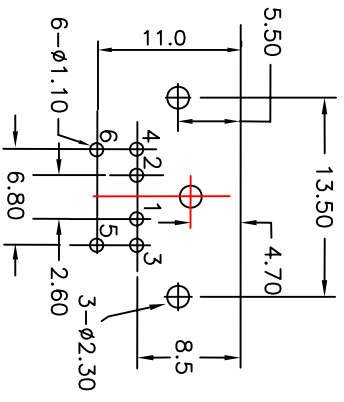

PCB RECOMMENDED LAYOUT
 (BOTTOM VIEW)

Tolerance
 .x ±0.35
 .xx ±0.25
 UNIT: mm

CONFIDENTIAL



© Copyright 2010 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 10/25/10	TITLE: MINI DIN FULL SHIELD with FERRITE
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO. R5145-6-FT
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 of 1
APPROVED:	DATE:	REV A

NOTE:
 This component and all homogeneous subcomponents are RoHS compliant