



ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	7/06/12	KL	

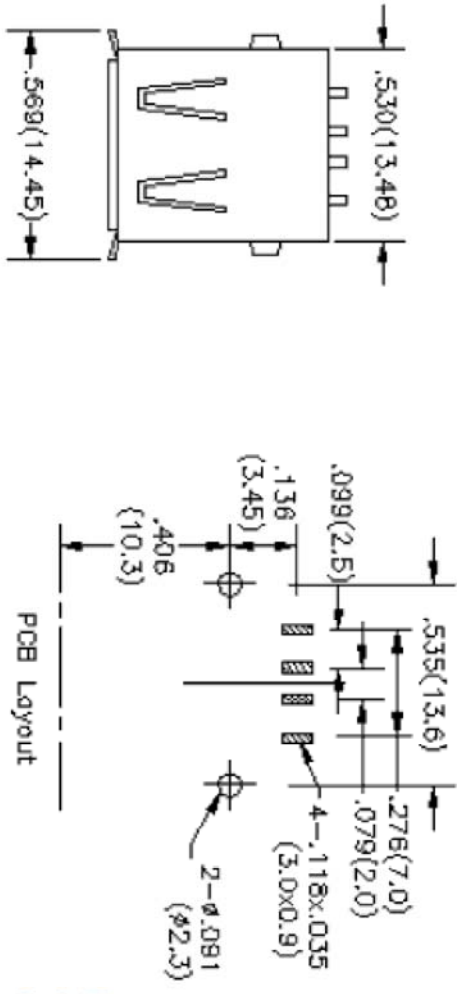

PCB Layout

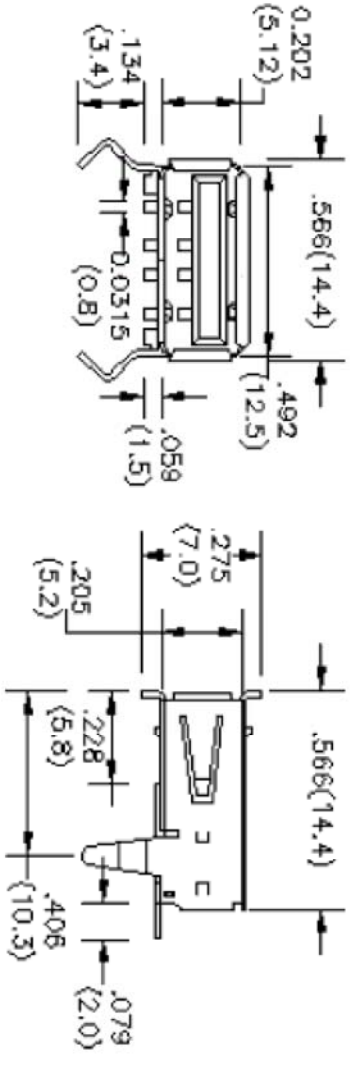

UNIT: INCHES(mm)

Tolerance	±0.25
.xx	±0.13
.xxx	±1°
ang.	±1°

- ELECTRICAL:**
- Current rating: 1.0 Amp Max.
 - Contact resistance: 30 Milliohms MAX at 1 Amp
 - Insulation resistance: 1000 MegOhms at 500V DC
 - Operating temperature: -55°C to +85°C
 - Dielectric withstanding voltage: 750 VAC at sea level

- MATERIAL:**
- Contact: Phosphor bronze, Gold flash plated
 - Insulator: LCP UL94V-0
 - Solderails: Tin plated
 - Shell: Copper Alloy

CONFIDENTIAL



© Copyright 2012 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 7/06/12	TITLE: USB TYPE A SURFACE MOUNT
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO: R90S-A-SMT
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 of 1

5 4 3 2 1

A B C D