

5

4

3


2

1

DWG NO. RHO-1511A-NL

RoHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	7/30/14	KL	

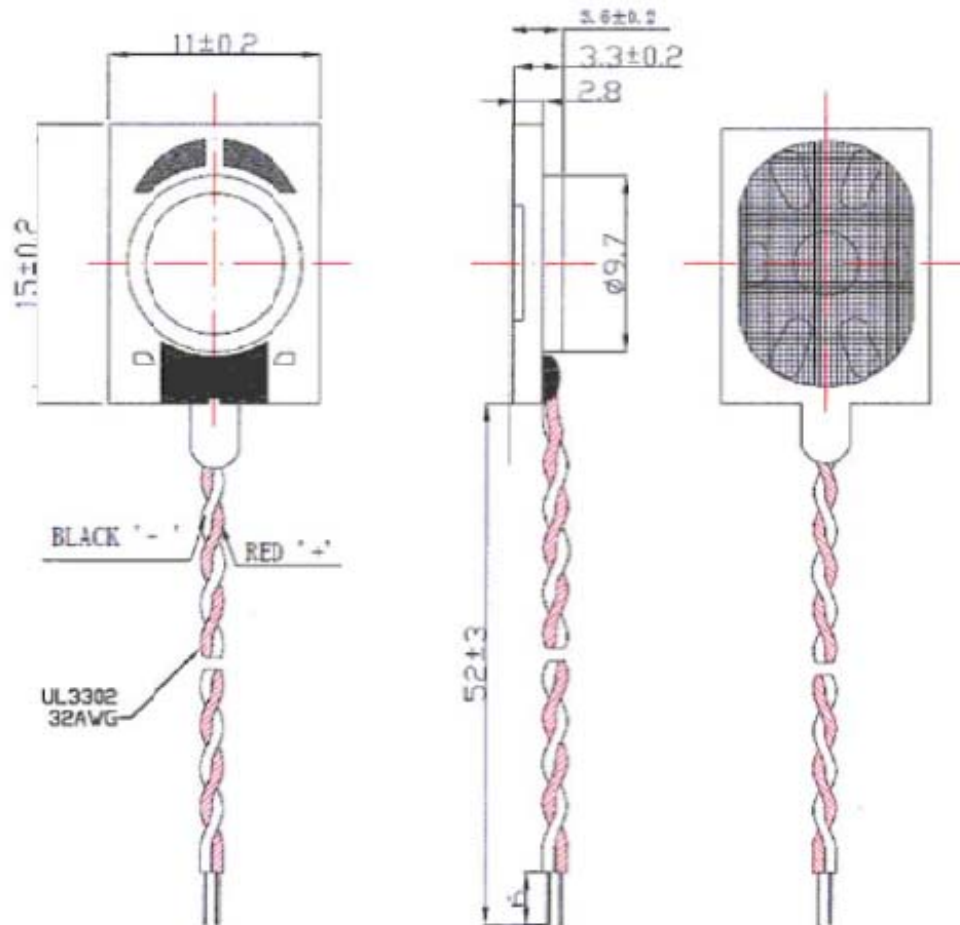

Tolerance  $\pm 0.3$ mm UNIT: mm

SPECIFICATION:

Rated Impedance	8 Ohms $\pm 15\%$
Rated Power	0.5W Max. 1W
Resonant Frequency	1200Hz $\pm 20\%$
Effective Freq. Range	1000~20K Hz
SPL (at 0.1w, 0.1m)	102 $\pm 3$ dB
Operating Temperature	-20°C~+50°C
Storage Temperature	-25°C~+60°C

CONFIDENTIAL

© Copyright 2013 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.



DRAWN: KIM	DATE 7/30/13	TITLE: HIGH POWER MICRO SPEAKER OVAL	
CHECKED:	DATE		
ENGINEER:	DATE		
APPROVED:	DATE		
APPROVED:	DATE	SIZE B	DRAWING NO. RHO-1511A-NL
APPROVED:	DATE	SCALE: NONE	REV A
		SHEET 1 OF 1	

5

4

3

2

1

C-RHO-1511A-NL

A