



ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	8/10/16	KL	

DWG NO. R90AB-5MN-SMT

- Note:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP, 30VAC
 - INSULATION RESISTANCE: 100MOHMS MIN
 - CONTACT RESISTANCE: 50mOHMS
 - WITHSTANDING VOLTAGE: 300VAC
 - OPERATING TEMPERATURE: -55°C TO +85°C
 - MECHANICAL:
 - MATING FORCE: 30N MAX
 - UNMATING FORCE: 7N MIN.
 - MATERIAL:

TERMINAL: COPPER ALLOY PLATED GOLD/TIN
 SHELL: COPPER ALLOY PLATED NICKEL
 HOUSING: LCP UL94V-0
 - PACKAGE: 750 Pcs Tape and Reel Packaging with Pick and Place Pod

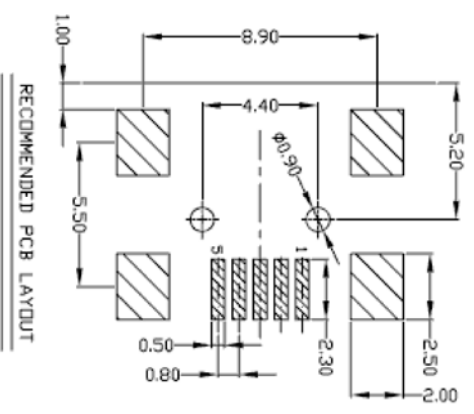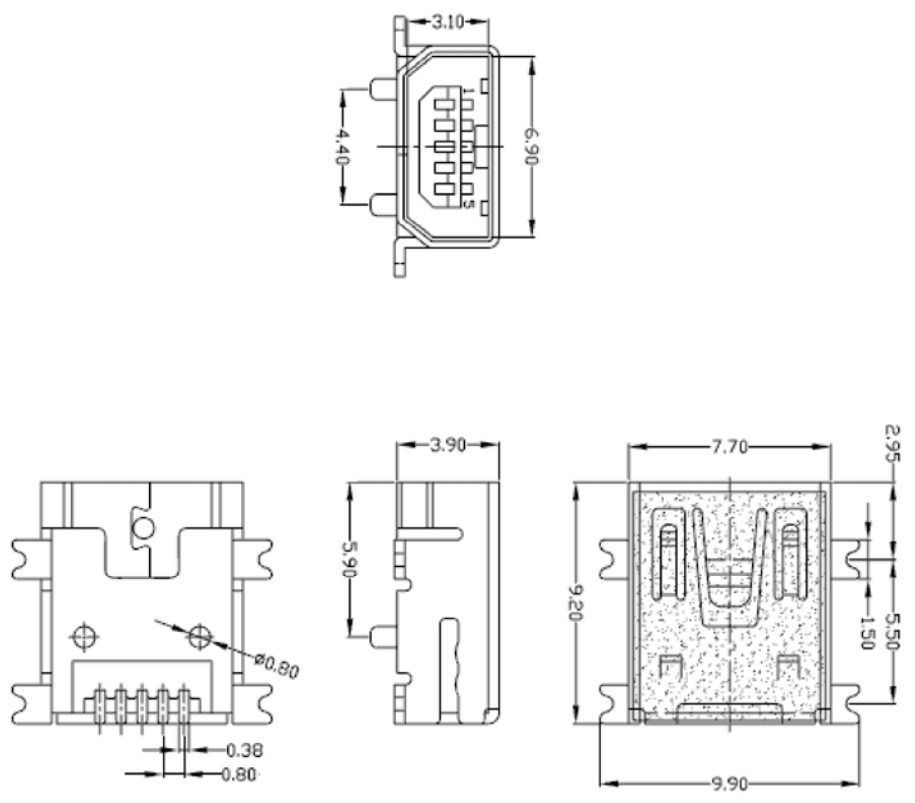

Tolerance	±0.25
.xx	±0.15
.xxx	±1°
ang.	±1°

UNIT: mm

CONFIDENTIAL



© Copyright 2016 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 8/10/16	TITLE: MINI USB 5 Pin Socket AB Type
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO.: R90AB-5MN-SMT
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 of 1
APPROVED:	DATE:	REV: A

5 4 3 2 1

A B C D