



ROHS COMPLIANT

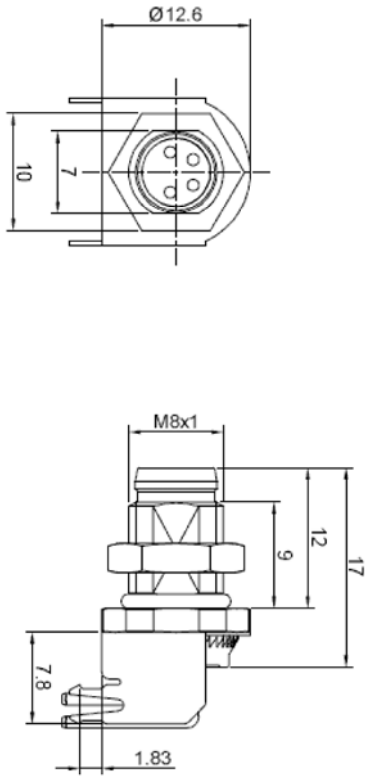

General Specifications

- Connector locking system: Screw
- Termination: Dip Solder
- Temperature range: -40°C ~ +85°C
- Mating cycles: > 100
- Degree of protection: IP67 when mated
- Contact: CU2N
- Contact plating: Gold plated
- Housing: PA66+GF
- Base shell: CU2N nickel plated
- Hex nut: CU2N nickel plated
- Shielding: CU2N nickel plated
- Sealing: FKM/NBR
- Adhesive: Epoxy

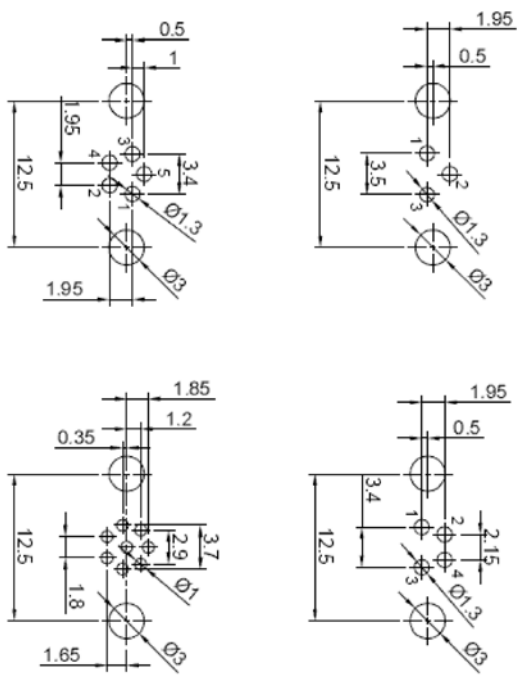

Pin front view	Rated voltage	Rated current
	60V	4A
	30V	4A
	30V	4A
	30V	1.5A

Tolerance
 <1.5: ±0.05
 1.5~10: ±0.1
 >10: ±0.2

UNIT: mm

CONFIDENTIAL



© Copyright 2019 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

REV	ECO NO.	DATE	BY	App'D
A	REL TO PRODUCTION PER ECO 001	8/7/19	KL	

DRAWN: KIM	DATE: 8/7/19	TITLE: M8 Male Right Angled PCB Type
CHECKED:	DATE:	
ENGINEER:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
SCALE: NONE	DRAWING NO. M8BRAMXX	REV A
SHEET 1 of 1		