


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	8/9/19	KL	

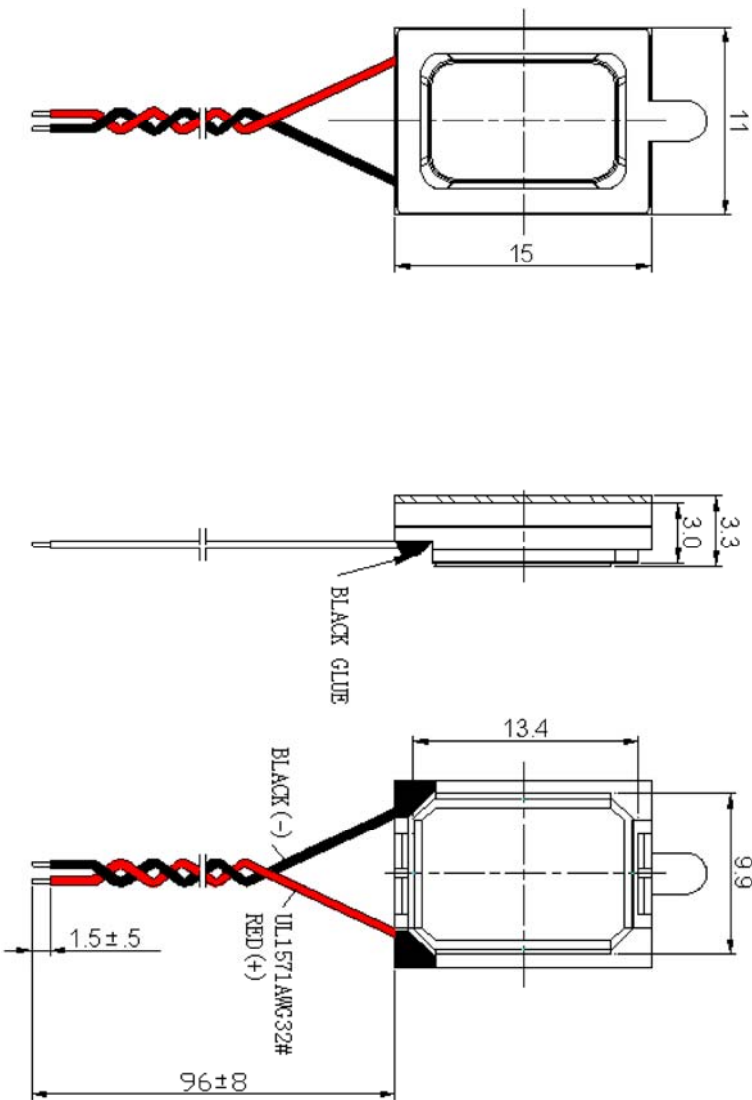

SPECIFICATIONS:

- Rated Impedance: 8 Ohms ±15%
- Rated Power: 0.5W Max. 0.8W
- Resonant Frequency: 710 ±20%
- Effective Freq. Range: fo - 12kHz
- SPL (at 0.1w, 0.1m) 83 ±3dB
- Operating Temp.: -20°C ~ +60°C

mylar cone  
 Front side rating: IP67 (dust tight / waterproof)  
 Requires mounting in IP67 rated enclosures

CONFIDENTIAL

© Copyright 2019 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

Tolerance: ±0.3mm

UNIT: mm



HIGH POWER  
 MICRO SPEAKER

DRAWN: KIM	DATE: 8/9/19	TITLE: HIGH POWER MICRO SPEAKER
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO. RHO-1511A-NL67
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 of 1

5 4 3 2 1

C-RHO-1511A-NL67