


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REI TO PRODUCTION PER ECO 001	8/9/19	KL	

DWG NO. RHO-1609A-NL67

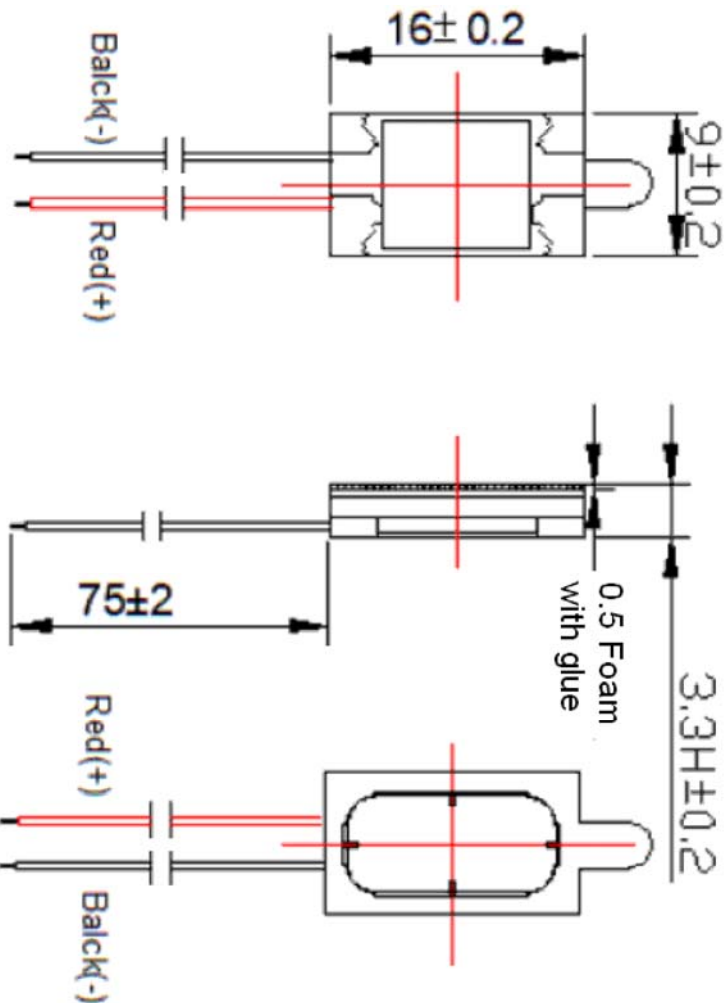

SPECIFICATIONS:

Rated Impedance: 8 Ohms ±15%  
 Rated Power: 0.5W Max. 0.8W  
 Resonant Frequency: 750 ±20%  
 Effective Freq. Range: fo - 4.2KHz  
 SPL (at 0.1w, 0.1m) 82 ±3dB  
 Operating Temp.: -20°C ~ +60°C

mylar cone  
 Front side rating: IP67 (dust tight / waterproof)  
 Requires mounting in IP67 rated enclosures

Tolerance: ±0.3mm

UNIT: mm

CONFIDENTIAL



HIGH POWER  
 MICRO SPEAKER

© Copyright 2019 Regal Electronics, Inc.  
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 8/9/19	TITLE: HIGH POWER MICRO SPEAKER
CHECKED:	DATE:	SCALE: NONE
ENGINEER:	DATE:	SIZE: B
APPROVED:	DATE:	DRAWING NO. RHO-1609A-NL67
APPROVED:	DATE:	REV: A
APPROVED:	DATE:	SHEET 1 of 1